

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

459-303P

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

09/284863

INTERNATIONAL APPLICATION NO.

PCT/DK97/00467

INTERNATIONAL FILING DATE

October 23, 1997

PRIORITY DATE CLAIMED

October 24, 1996, January 20, 1997 and
November 4, 1996

TITLE OF INVENTION

POLYOLEFIN FIBRES AND METHOD FOR THE PRODUCTION THEREOF

APPLICANT(S) FOR DO/EO/US

STENGAARD, Flemming Faurby; BALSLEV, Henrik & MARCAUSEN, Peter

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39 (1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau). Application No. WO 98/17746
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(3)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(2)).
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98./ International Search Report
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
 - 1.) PCT Request Form (PCT/RO/101)
 - 2.) International Preliminary Examination Report (PCT/IPEA/409) with amended claims (Four (4) sheets)
 - 3.) Three (3) Sheet(s) of Formal Drawings

U.S. APPLICATION NO (if known, see 37 CFR 1.5) <div style="text-align: center; font-weight: bold;">NEW</div>		INTERNATIONAL APPLICATION NO <div style="text-align: center;">PCT/DK97/00467</div>		ATTORNEY'S DOCKET NUMBER <div style="text-align: center;">459-303P</div>	
---	--	---	--	---	--

17. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO. \$970.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$840.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO. \$760.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$670.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4). \$96.00 <div style="text-align: right; font-weight: bold;">ENTER APPROPRIATE BASIC FEE AMOUNT =</div>	CALCULATIONS PTO USE ONLY																										
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).	<div style="display: flex; justify-content: space-between;"> \$ 840.00 </div>																										
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:20%;">CLAIMS</th> <th style="width:20%;">NUMBER FILED</th> <th style="width:20%;">NUMBER EXTRA</th> <th style="width:20%;">RATE</th> <th style="width:20%;"></th> </tr> <tr> <td>Total Claims</td> <td>25 - 20 =</td> <td>5</td> <td>X \$18.00</td> <td>\$ 90.00</td> </tr> <tr> <td>Independent Claims</td> <td>2 - 3 =</td> <td>0</td> <td>X \$78.00</td> <td>\$ -----</td> </tr> <tr> <td colspan="3">MULTIPLE DEPENDENT CLAIM(S) (if applicable) none</td> <td>+ \$260.00</td> <td>\$ -----</td> </tr> <tr> <td colspan="4" style="text-align: right;">TOTAL OF ABOVE CALCULATIONS =</td> <td>\$ 1,060.00</td> </tr> </table>	CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		Total Claims	25 - 20 =	5	X \$18.00	\$ 90.00	Independent Claims	2 - 3 =	0	X \$78.00	\$ -----	MULTIPLE DEPENDENT CLAIM(S) (if applicable) none			+ \$260.00	\$ -----	TOTAL OF ABOVE CALCULATIONS =				\$ 1,060.00	<div style="display: flex; justify-content: space-between;"> \$ 130.00 </div>	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE																								
Total Claims	25 - 20 =	5	X \$18.00	\$ 90.00																							
Independent Claims	2 - 3 =	0	X \$78.00	\$ -----																							
MULTIPLE DEPENDENT CLAIM(S) (if applicable) none			+ \$260.00	\$ -----																							
TOTAL OF ABOVE CALCULATIONS =				\$ 1,060.00																							
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).	<div style="display: flex; justify-content: space-between;"> \$ ----- </div>																										
<div style="text-align: right; font-weight: bold;">SUBTOTAL =</div>	<div style="display: flex; justify-content: space-between;"> \$ 1,060.00 </div>																										
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).	<div style="display: flex; justify-content: space-between;"> \$ ----- </div>																										
<div style="text-align: right; font-weight: bold;">TOTAL NATIONAL FEE =</div>	<div style="display: flex; justify-content: space-between;"> \$ 1,060.00 </div>																										
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +	<div style="display: flex; justify-content: space-between;"> \$ ----- </div>																										
<div style="text-align: right; font-weight: bold;">TOTAL FEES ENCLOSED =</div>	<div style="display: flex; justify-content: space-between;"> \$ 1,060.00 </div>																										
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:70%;"></td> <td style="width:15%; text-align: center;">Amount to be: refunded</td> <td style="width:15%; text-align: center;">\$</td> </tr> <tr> <td></td> <td style="text-align: center;">charged</td> <td style="text-align: center;">\$</td> </tr> </table>				Amount to be: refunded	\$		charged	\$																			
	Amount to be: refunded	\$																									
	charged	\$																									

a. ☒ A check in the amount of \$ **1,060.00** to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account. No. _____ in the amount of \$ _____ to cover the above fees.
 A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
 overpayment to Deposit Account No. 02-2448.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

Send all correspondence to:
Birch, Stewart, Kolasch & Birch, LLP
P.O. Box 747
Falls Church, VA 22040-0747
(703)205-8000

SIGNATURE

FARACI, C. JOSEPH
 NAME

32,350
 REGISTRATION NUMBER

/tup April 22, 1999

459-303P

IN THE U.S. PATENT AND TRADEMARK OFFICE

APPLICANT: Flemming Faurby STENGAARD et al.

INT'L. APPLN. NO.: PCT/DK97/00467

SERIAL NO.: New

GROUP:

FILED: April 22, 1999

EXAMINER:

FOR: POLYOLEFIN FIBRES AND METHOD FOR THE PRODUCTION THEREOF

PRELIMINARY AMENDMENT

Assistant Commissioner of Patents
and Trademarks
BOX PATENT APPLICATION
Washington, D.C. 20231

April 22, 1999

Sir:

The following Preliminary Amendments and Remarks are respectfully submitted in connection with the above-identified application.

IN THE SPECIFICATION:

Before line 1, insert --This application is the national phase under 35 U.S.C. §371 of PCT International Application No. PCT/DK97/00467 which has an International filing date of October 23, 1997 which designated the United States of America.--

R E M A R K S

The specification has been amended to provide a cross-reference to the previously filed International Application.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. §1.16 or under 37 C.F.R. §1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By

A handwritten signature in black ink, appearing to read "C. Joseph Faraci", written over a horizontal line.

C. JOSEPH FARACI

Reg. No. 32,350

P.O. Box 747

Falls Church, VA 22040-0747

(703) 205-8000
CJF/tnp

POLYOLEFIN FIBRES AND METHOD FOR THE PRODUCTION THEREOF

FIELD OF THE INVENTION

- 5 The present invention relates to thermobondable polyolefin-containing synthetic fibres or filaments, in particular cardable staple fibres, treated with hydrophobic spin finishes comprising an antistatic agent and a hydrophobic agent, a method for producing the fibres or filaments, and
10 nonwoven products prepared from the fibres or filaments.

- The fibres, which have the advantage of being able to be carded at high speeds, are particularly suitable for use in the preparation of thermally bonded hydrophobic nonwoven
15 fabrics in which a dry, water repellent surface which can function as a liquid barrier is desired, e.g. for disposable diapers and feminine hygienic products. The fibres are also suitable for the preparation of thermally bonded nonwoven fabrics for medical use in which a dry, water repellent
20 surface is desired in order to reduce bacterial penetration, for example medical gowns and drapes.

BACKGROUND OF THE INVENTION

- 25 Hygienic products such as disposable diapers, sanitary napkins and adult incontinence pads generally have barriers through which fluids absorbed by the absorbent core are not able to penetrate, e.g. in the form of side guards or other structural elements or as back sheet material opposite to
30 the skin. Such barriers may comprise a nonwoven material prepared from hydrophobic staple fibres or a spunbonded material prepared directly from a hydrophobic polymer. However, spunbonded materials are relatively flat and film-like, and do not have the soft, uniform, textile-like com-
35 fort that one finds in carded nonwovens. Spunbonded fabrics are therefore not the optimal choice for liquid barriers designed to be in contact with the skin of the user. Also, spunbonded nonwovens have a non-uniform distribution of fibres, which results in weak areas (holes) that limit the

liquid barrier properties of the fabrics, so that web uniformity becomes the limiting factor for the hydrophobic characteristics. As for nonwovens prepared from staple fibres, these tend not to be sufficiently hydrophobic for such liquid barriers, due to the fact that during the spinning process, the fibres are treated with a "spin finish" which facilitates the spinning and subsequent carding process by lubricating the fibres and making them antistatic. However, as a result of the spin finish treatment, in particular the use of an antistatic agent, which by nature is more or less hydrophilic, polyolefin fibres, although inherently hydrophobic, become somewhat hydrophilic, which in the present context is undesirable. On the other hand, fibres with the desired degree of hydrophobicity have generally had less than optimal antistatic properties.

Nonetheless, a number of polyolefin-containing hydrophobic synthetic fibres are known, for example hydrophobic textile fibres with dirt and stain resistant properties. However, such fibres generally contain cationic antistatic agents that are undesirable or unsuitable for personal hygiene and medical products for toxicological reasons, since they often exhibit skin irritating properties due to their low pH. Also, some components may during use release di- or tri-ethanolamine, which is suspected of causing allergic reactions. It is also known to treat polyolefin fibres with a finish containing a polysiloxane as the hydrophobic agent, but nonwovens obtained from such fibres often suffer from poor tear strength. It has previously proved difficult to produce fibres for hygienic or medical use with satisfactory hydrophobic properties while maintaining good cardability properties and high nonwoven tenacities. This is particularly important for the many applications in which it is desired that hydrophobic fibres may be carded using high carding speeds.

US 4,938,832 discloses a method for preparing hydrophobic polyolefin-containing fibres or filaments in which spun fibres or filaments are treated with a first modifier

composition containing 70-100% by weight of at least one neutralised phosphoric acid ester containing a lower alkyl group and up to 30% by weight of at least one polysiloxane with hydrophobic end groups, followed by treatment with a
5 second modifier composition containing 70-100% by weight of the polysiloxane and up to 30% by weight of the neutralised phosphoric acid ester.

EP 0 486 158 A2 discloses a somewhat similar method for
10 preparing hydrophobic polyolefin-containing fibres or filaments, in which spun fibres or filaments are treated with a first modifier composition containing 0-40% by weight of at least one neutralised phosphoric acid ester containing a lower alkyl group and 60-100% by weight of at least one
15 polysiloxane with hydrophobic end groups, followed by treatment with a second modifier composition containing 50-100% by weight of the neutralised phosphoric acid ester and 0-50% by weight of the polysiloxane.

EP 0 516 412 A2 discloses a method for treating the surface of polyolefin-containing fibres to improve their lubricity and antistatic properties by applying a liquid lubricating finish containing an alkylated polyol or a water-soluble ester or polyester obtained by reacting the polyol with a
20 fatty acid having up to 6 carbon atoms. A polysiloxane and a neutralised phosphoric acid ester may also optionally be applied to the fibres.

EP 0 557 024 A1 discloses polyolefin fibres treated with an
30 antistatic agent which is a neutralised phosphate salt, and optionally with a lubricant selected from mineral oils, paraffinic waxes, polyglycols and silicones, the fibres having an hydrostatic head value of at least 102 mm.

Japanese patent publication No. 4-24463/1992 (application No. 86/84081) discloses polyester fibres coated with a spinning oil consisting of 40-85% by weight of at least one
35 neutral oil with a melting point of 30-150°C, 5-30% by

weight of a cationic surfactant, and the balance of an emulsifier. As discussed above, the use of cationic surfactants is, however, undesirable in products designed for personal hygiene or medical use.

5

WO 94/20664 describes a method for producing cardable, hydrophobic polyolefin-containing staple fibres using two spin finishes, in which the second spin finish is a dispersion comprising an antistatic agent, preferably an anionic or
10 non-ionic antistatic agent, and, as a hydrophobic agent, a natural or synthetic hydrocarbon wax or wax mixture, and optionally a silicone compound.

15

WO 95/19465 describes a method for producing cardable, hydrophobic polyolefin-containing staple fibres by applying, after spinning, a first spin finish composition containing at least one cationic antistatic agent and, after stretching, a second spin finish composition containing at least one hydrophobic lubricant chosen from a fatty acid amide
20 condensation product and a hydrocarbon wax.

20

The fibres described in the above-mentioned publications all have various combinations and degrees of hydrophobic and antistatic properties. However, there is still a need for
25 polyolefin fibres with optimum hydrophobic and antistatic properties for the preparation, in particular by means of high-speed carding, of nonwovens with optimum strength and hydrophobic characteristics.

25

30

An object of the present invention is therefore to provide hydrophobic thermobondable synthetic fibres, in particular for hygienic applications, with both optimum hydrophobic and antistatic properties, and thus with improved carding properties suitable for preparation of nonwovens showing
35 superior strength and softness. A further object of the present invention is to improve the application and distribution of spin finish on the fibres by carefully controlling the surface properties of the as-spun filaments, thus improving fibre uniformity, allowing increased carding

35

speed and improved web uniformity in the carding process, which in turn results in nonwovens with improved hydrophobic properties.

5 BRIEF DISCLOSURE OF THE INVENTION

In one aspect, the present invention relates to a method for producing hydrophobic polyolefin-containing fibres or filaments, in particular cardable staple fibres, the method comprising the following steps:

- a. melt spinning a polyolefin-containing material to produce spun filaments,
- b. applying to the spun filaments a first spin finish with an active ingredient content comprising 20-100% by weight of at least one water-insoluble ester of a mono-, di- tri- or tetrahydric alcohol with a molecular weight not exceeding 500 and a branched or straight chain fatty acid with between 12 and 30 carbon atoms,
- c. stretching the filaments,
- d. applying to the stretched filaments a second spin finish with an active ingredient content comprising 20-100% by weight of at least one water-insoluble ester of a mono-, di- tri- or tetrahydric alcohol with a molecular weight not exceeding 500 and a branched or straight chain fatty acid with between 12 and 30 carbon atoms,
- e. optionally, crimping the filaments,
- f. applying, during the spinning stage, the stretching stage or after crimping, an antistatic agent,
- g. drying the filaments, and
- h. for the production of fibres, cutting the filaments to obtain staple fibres.

Further aspects of the invention relate to texturized, cardable, polyolefin-containing fibres produced by the above method, as well as hydrophobic nonwoven materials containing such fibres.

The fibres of the present invention have been found to have excellent hydrophobic properties as well as excellent anti-

static properties and can therefore be carded at high card-
ing speeds comparable to carding speeds typically used for
hydrophilic staple fibres. It has furthermore been found
that webs prepared from the fibres have a uniform distribu-
5 tion of the fibres in both the machine direction and the
transverse direction, and that when these webs are thermo-
bonded by calender bonding, nonwovens with improved strength
and excellent hydrophobicity are obtained.

10 DETAILED DISCLOSURE OF THE INVENTION

The term "polyolefin-containing material" for the purpose of
this invention means a polymeric material of which the larg-
est part (by weight) consists of homo- or copolymers of
15 monoolefins such as ethylene, propylene, 1-butene, 4-methyl-
1-pentene, etc. Examples of such polymers are isotactic or
syndiotactic polypropylene, polyethylenes of different den-
sities, such as high density polyethylene, low density poly-
ethylene and linear low density polyethylene and blends of
20 the same. The polymeric material may be mixed with other
non-polyolefin polymers such as polyamide or polyester, pro-
vided that polyolefins still constitute the largest part of
the composition. The melts used to produce the polyolefin-
containing fibres may also contain various conventional fi-
25 bre additives, such as calcium stearate, antioxidants, proc-
ess stabilizers, compatibilizers and pigments, including
whiteners and colourants such as TiO_2 , etc.

Although the present description will for the sake of sim-
30 plicity generally refer to "fibres", i.e. cut staple fibres,
it is to be understood that the present invention will also
be applicable to the production of continuous polyolefin
filaments, e.g. spunbonded filaments.

35 The hydrophobic fibres may be either monocomponent or bicom-
ponent fibres, the latter being for example sheath-core type
bicomponent fibres with the core being located either eccen-
trically (off-center) or concentrically (substantially in
the center). Bicomponent fibres will typically have a core

and sheath which comprise, respectively, polypropyl-
ene/polyethylene, high density polyethylene/linear low den-
sity polyethylene, polypropylene random copolymer/-
polyethylene, or polypropylene/polypropylene random copoly-
mer.

The spinning of the fibres is preferably accomplished using
conventional melt spinning (also known as "long spinning"),
with spinning and stretching being performed in two separate
steps. Alternatively, other means of manufacturing staple
fibres, in particular "compact spinning", which is a one
step operation, may be used to carry out the invention.

For spinning, the polyolefin-containing material is extruded
and the polymer melt is passed through the holes of a spin-
neret. The extrudates are subsequently cooled and solidified
by a stream of air and at the same time drawn into fila-
ments. After having solidified, the filaments are treated
with the first spin finish. This is typically performed by
means of lick rollers, but alternative systems, such as
spraying the bundles of filaments or dipping them in the
spin finish, are also suitable.

It has been found by the present inventors that in order to
obtain the full advantage of the invention, the spinning
conditions must be carefully adjusted. Generally speaking,
the hydrophobicity of the fibre and consequently of the non-
woven material suffers if the fibre is too highly degraded.
On the other hand, if the degradation is too low, the fibres
tend to have poor thermobonding properties as well as poor
processability on the spinning line. The degradation of the
polymer depends on the content of stabilizers in the
polyolefin-containing material, the temperature of the ex-
truder and the speed and temperature of the quenching air. A
means to determine the level of degradation of the as-spun
fibres is to measure the melt flow rate (MFR) of the fibre
and compare this with the MFR of the initial polymeric mate-
rial. In a preferred embodiment of the present invention the
MFR of the as-spun fibres is between 1.5 and 7 times the MFR

of the raw material, typically between 2 and 5 times the MFR of the raw material. It should be noted however, that this is to a certain extent dependent upon the MFR of the raw material. Thus, the preferred ratio between fibre MFR and raw material MFR will often be slightly lower for a raw material with a relatively high MFR, e.g. 3-5 times for a raw material with an MFR of 10-15 and 2-4 times for a raw material with an MFR of 15-25.

- 10 An example of a general method to regulate the ratio between the MFR of the as-spun fibres and the MFR of the raw material is as follows. The fibre MFR is measured at conditions that allow stable spinning, and this value is compared to the MFR of the polymer raw material. If the MFR of the spun fibre is higher than desired in relation to the raw material MFR, the fibre MFR is decreased by reducing the temperature of the extruder and/or by increasing the velocity of the quench air. Conversely, if the fiber MFR is too low, the extruder temperature should be raised and/or the velocity of the quench air lowered.

- The stretching process typically involves a series of hot rollers and a hot air oven. The filaments pass first through one set of rollers, followed by passage through a hot air oven, and then passage through a second set of rollers. Both the hot rollers and the hot air oven typically have a temperature of about 50-140°C, e.g. about 70-130°C, the temperature being chosen according to the type of fibre, e.g. typically 115-135°C for polypropylene fibres, 95-105°C for polyethylene fibres, and 110-120°C for polypropylene/-polyethylene bicomponent fibres. The speed of the second set of rollers is faster than the speed of the first set, and hence the heated filaments are stretched accordingly. A second oven and a third set of rollers can also be used (two-stage stretching), with the third set of rollers having a higher speed than the second set. Similarly, additional sets of rollers and ovens may be used. The stretch ratio is the ratio between the speed of the last and the first set of

rollers. The fibres of the present invention are typically stretched using a stretch ratio of from about 1.05:1 to about 6:1, e.g. from 1.05:1 to 2:1 for polypropylene fibres, and from 2:1 to 4.5:1 for polyethylene fibres and polypropylene/polyethylene bicomponent fibres, resulting in an appropriate fineness, i.e. about 1-7 dtex, typically about 1.5-5 dtex, more typically about 1.6-3.4 dtex, e.g. 1.7-3.3 dtex.

- 10 After stretching, the bundles of filaments are treated with the second spin finish, for example using lick rollers or by spraying or dipping.

- 15 The stretched fibres are normally texturized (crimped) in order to make the fibres suitable for carding by giving them a "wavy" form. An effective texturization, i.e. a relatively large number of crimps in the fibres, allows for high processing speeds in the carding machine, e.g. at least 80 m/min, typically at least 150 m/min or even 200 m/min or more, and thus a high productivity.

- 20 Crimping is conveniently carried out using a so-called stuffer box, or, as an alternative, the filaments can be air-texturized. In certain cases, i.e. for asymmetric bicomponent fibres, crimping devices may be eliminated, since heat treatment of such fibres leads to three-dimensional self-crimping.

- 25 The fibres of the present invention are typically texturized to a level of about 5-15 crimps/cm, typically about 7-12 crimps/cm (the number of crimps being the number of bends in the fibres).

- 30 A third treatment of spin finish may optionally be applied to the filaments after the crimper, e.g. by spraying.

After crimping the filaments are typically led through a hot air oven for fixation and drying. The temperature of the oven depends on the composition of the fibres, but must ob-

viously be below the melting point of the lowest melting component. The temperature of the oven is typically in the range of 90-130°C, e.g. 95-125°C. The heat treatment also removes a certain amount of the water from the spin finishes.

- 5 The drying process, which is an important factor for the hydrophobicity of the product, allows the hydrophobic lubricant to melt and become distributed uniformly on the surface of the filaments. The residual moisture content is preferably less than 2.0%, more preferably less than 1.5% by weight
10 based on the weight of the fibre.

- The dried filaments are then led to a cutter, where the fibres are cut to staple fibres of the desired length. The fibres of the present invention are typically cut to staple
15 fibres of a length of about 18-150 mm, more typically about 25-100 mm, in particular about 30-65 mm.

- In the method of the present invention the antistatic is preferably nonionic, such as a phosphate ester, or anionic,
20 such as a phosphate salt. While it is contemplated that cationic antistatic agents also may be used in the context of the present invention, these are less preferred. The antistatic agent may be applied at any of three points on the fibre line, i.e. after spinning, after stretching or after
25 the crimper. In a preferred embodiment, however, the majority or even all of the antistatic agent is applied after the crimper. The reason for this is twofold. Firstly, some of the spin finish tends to be squeezed off before the crimper. At that stage the spin finish is an aqueous dispersion, and
30 therefore the loss of antistatic agent, which is the most hydrophilic substance therein, is most pronounced. Secondly, if the antistatic agent is applied at a too early stage it may hinder the formation of a film by the hydrophobic lubricant. Thus, if the antistatic agent is applied too early,
35 i.e. after spinning or stretching, the resulting fibres tend to have less than optimal antistatic properties due to the squeezing off of the antistatic agent before the crimper and less than optimal hydrophobic properties due to the poor

film formation of the hydrophobic agent on the fibre surface.

5 The total amount of antistatic agent applied to the fibres is preferably as low as possible while still achieving the desired antistatic effect, e.g. between 0.01 and 0.50%, preferably between 0.02 and 0.35% and still more preferably between 0.05 and 0.20% by weight based on the weight of the fibres.

10

The first and a second spin finish compositions, which are applied after spinning and after stretching the filaments, respectively, typically comprise as active ingredients (by weight):


15 20-100% of the at least one water-insoluble ester,
0-80% of the mineral oil,
0-10% of the ethoxylated alcohol, and
0-30% of an anionic or nonionic antistatic agent.

20 The first and second spin finish compositions may be different or the same within the above specifications.


In a preferred embodiment one or both of the first and second spin finish compositions comprise as active ingredients:
25 30-80% of the at least one water-insoluble ester,
20-70% of the mineral oil, and
0.1-5% of the ethoxylated alcohol.

In a more preferred embodiment one or both of the first and second spin finish compositions comprise as active ingredients:
30 35-65% of the at least one water-insoluble ester,
35-65% of the mineral oil, and
0.5-3% of the ethoxylated alcohol.

35 The water-insoluble ester component in the hydrophobic lubricant is preferably the reaction product of a polyol having the formula:



or

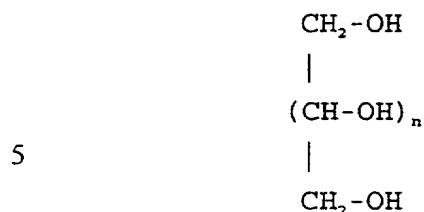

in which R is an alkyl group having 1 to 4 carbon atoms; m is 0 to 3 and n is 0 to 4;

and a branched or straight chained fatty acid having between 12 and 30 carbon atoms, preferably between 14 and 26 carbon atoms and more preferably between 16 and 20 carbon atoms. The fatty acid may be saturated or unsaturated. The alcohol can e.g. be ethylene or propylene glycol, glycerol, neopentyl glycol, trimethylolethane or trimethylolpropane. The compound may contain one or more ester group, i.e. it may be a monoester, a diester or a polyester. In the case of compounds with more than one ester group, at least one ester group must be of the type specified above, i.e. an ester of a branched or straight chain fatty acid with 12-30 carbon atoms. The other ester group(s) may thus be of this type or of another type, for example an ester of a short chain carboxylic acid having e.g. 2-6 carbon atoms.

An example of a preferred water-insoluble ester is a low viscosity ester in the form of a monoester of a higher fatty acid (C₁₄-C₁₈) and a branched chain alcohol, e.g. a tridecyl stearate, in particular isotridecyl stearate, which is an ester of the monohydric alcohol isotridecanol (C₁₃H₂₈O) and stearic acid.

One or, preferably, both of the spin finishes preferably also comprise a small amount of a wetting agent which serves to reduce surface tension and thereby provide an improved wetting of the lick rollers which are typically used to apply the spin finishes. The wetting agent should be one which reduces surface tension of the spin finish by at least 2 dynes/cm, preferably at least 3 dynes/cm, more preferably

at least 4 dynes/cm. It should also obviously be compatible with the aim of producing hydrophobic fibres and should therefore not be used in an excessive amount which could tend to give the fibres undesired hydrophilic properties.

- 5 The wetting agent may e.g. be based on a soap, an alcohol or a fatty acid, e.g. a compound selected from the group consisting of glycerides, fatty acid amides, fatty acid amines, polyglycol esters, polyethoxylated amides, nonionic surfactants, anionic surfactants, cationic surfactants, 10 phosphate esters and derivatives (e.g. salts, amines or amides) thereof and blends of the above. In a preferred embodiment, the wetting agent is one which is thermally unstable and which decomposes to volatile compounds when heated, e.g. when the fibres are subjected to thermobonding, 15 so that the wetting agent is not present in the finished nonwoven and therefore does not impair the hydrophobic properties of the nonwoven. The wetting agent is typically present in the spin finish in an amount of about 0.1-2% (% active ingredient by weight based on the total active 20 ingredient content), e.g. 0.3-1%.

An example of a preferred wetting agent for the reduction of surface tension is an amine oxide, e.g. lauramine oxide, $C_{12}H_{25}N(CH_3)_2O$.

25


- In order to reduce fibre/metal friction during stretching, texturization and cutting of the fibres as well as during the carding of the fibres, it is advantageous to add a friction reducing additive to the first and/or second spin 30 finish, typically only the second spin finish. The friction reducing additive typically comprises a wax or wax mixture and/or a silicone compound. In the case of a wax, the wax may be selected from the group of hydrocarbon waxes, including paraffin waxes, microcrystalline waxes, and 35 natural waxes such as insect or plant waxes. Paraffin waxes typically have a melting point in the range of about 45-65°C, while the melting point of microcrystalline waxes is typically in the range of about 50-95 °C. (The solidifying point of a hydrocarbon wax is normally about 2-3 °C below

the melting point). A preferred wax for the purposes of the present invention is a paraffin wax with a melting point in the range of about 45-60 °C, preferably about 48-55 °C

(corresponding to paraffin of about C₂₀-C₃₄), or a mixture of

5 paraffin and/or other waxes having a melting point in this range. It should be noted in this regard that since waxes normally consist of a mixture of different hydrocarbons, this will also typically be the case for the waxes used for the purpose of the present invention. The "wax" will
10 therefore typically be a mixture of different wax types, some of which may be waxes having higher or lower melting points than those given above, as long as the melting point of the total mixture lies within the ranges stated above.

15 In the case of a silicone (polydiorganosiloxane) compound, this is typically a polydialkylsiloxane of the formula:



20 in which each R is independently an alkyl group containing 1-4 carbon atoms, phenyl or H, n is a number in the range of 20-3000, and X and Y are each independently OH, CH₃, H, O-CH₃ or O-acetyl. A preferred polydialkylsiloxane is polydimethylsiloxane.

25

The content of friction reducing additive in the spin finish is typically in the range of about 0.5-15% (% active ingredient by weight based on the total active ingredient content), e.g. 1-10%.

30

Further information regarding the use of waxes and silicone compounds as a friction reducing or controlling additive is found in WO 95/19465 and WO 94/20664, to which reference is made.

35

The amount of spin finish applied after spinning is typically between 0.01 and 0.5%, preferably between 0.05 and 0.30% based on the weight of the fibres. Similarly, an amount of spin finish corresponding to between 0.01 and

0.7%, preferably between 0.10 and 0.50% of the weight of the fibres is typically applied after stretching the filaments.

The total amount of hydrophobic lubricant applied is typically between 0.01 and 1.0%, preferably between 0.03 and 0.7%, e.g. between 0.15 and 0.5% based on the weight of the fibres.

It has found by the present inventors that the total amount of spin finish applied is important for the properties of the fibres. Thus, an overly finished fibre shows less than optimal hydrophobic characteristics, whereas a too meager application of spin finish causes processing problems, especially in the stretching section and in the card.

MEASUREMENT METHODS

The fibres described in the examples below are characterized according to various parameters which are important in determining the hydrophobicity and the bondability of the fibres. Most prominent of these parameters are the melt flow rate (MFR), the amount of finish on yarn (FOY) and the liquid repellency test.

All fibre measurements are carried out at conditions according to ISO 554 Standard Atmosphere (23/50)

For PP monocomponent fibres MFR is measured according to ISO 1133-1991 (E), condition No. 12 on a 7.5 g fibre sample which is dried for 15 min. at 100°C and subsequently cooled at room temperature for 15 min. in a desiccator. Note that the fibers still contain spin finish when the MFR is measured. The MFR of the raw material is determined similarly on a 6.0 g sample of polymer.

The FOY in % of the total weight of fibre is measured on a 10 g fibre sample which is dried at 100°C for 60 min. and subsequently cooled to room temperature in a desiccator. The fibres are weighed, placed in a conical flask and washed three times with 200 ml of isopropanol. The isopropanol is

transferred to a round flask with a known weight and evaporated on a rotary evaporator until dryness. The flask is dried for 1 hour at 45°C, cooled in a desiccator for 30 min. and weighed.

5

The liquid repellency test (used for determining the "water rising column" value, WRC, of the fibres) is performed as described in EP 0 557 024 A1 except for the following modifications: The column used and the sample holder had inside diameters of 3.95 cm and 4.0 cm, respectively, and the pump speed was maintained at 290 cc/min. The hole through which liquid was added to the column had a diameter of 0.6 cm. Instead of hand-carded fibre, a web from a lab-size card was cut out in circular slices with the same diameter as the sample holder, and 5.0 g +/- 0.10 g of these slices were fit into the sample holder.

Cohesion of the carded webs was determined using a simple carding test. This test is carried out by measuring the length a thin carding web of approximately 10 g/m² can support in a substantially horizontal position before it breaks due to its own weight, the length of the carded web being increased at a rate of about 15 m/min. This is performed by taking the web off the card in a horizontal direction at a speed of 15 m/min.

The carding length obtained by this method is a measure of the web cohesion or fibre/fibre friction, a high cohesion giving a high carding length. The fibre/fibre friction is dependent upon factors such as the composition of the spin finish and the degree of texturization, as well as how permanent the texturization is. Fibre/metal friction is also important for the cardability; if it is either too high or too low, the fibres are difficult to transport through the card.

Polyolefin fibres which are well suited for carding will typically be able to support about 1.5 m or more, e.g.

1.5-2.5 m, in the above-described web cohesion length test. Fibres designed for high speed carding should preferably be able to support somewhat more, i.e. at least about 2.0 m.

- 5 The strengths of different nonwoven materials in the examples are compared by using a so-called "bondability index" (BI), which compensates for differences in fibre randomization and which is calculated as explained below on the basis of nonwoven tensile strength measured in the machine direction and the cross direction. A standardized carding test
10 for determining the tensile strength of nonwovens is performed as follows:

15 From about 60-70 kg of fibres, webs with a base weight of 20-25 g/m² are produced by carding at the chosen speed at optimum roller settings with respect to uniformity of the web. The webs are subsequently calender bonded, the individual webs being thermobonded at different temperatures at intervals of typically 3°C within a range chosen according to
20 the type of fibres. For polypropylene fibres, a web with a base weight of about 23 g/m² is prepared by thermobonding at temperatures in the range of 145-157°C, using a calender pressure of 64 N/mm and a typical carding speed of 100 m/min. For bicomponent fibres with a polypropylene core and
25 a polyethylene sheath, a web with a base weight of about 23 g/m² prepared by thermobonding at temperatures in the range of 137-147°C, with a calender pressure of 40 N/mm and a typical carding speed of 80 m/min. The tensile strengths of the webs are then determined in the machine direction and
30 the cross direction according to the EDANA recommended test: Nonwovens Tensile Strength, 20 February, 1989, which is based on ISO 9073-3:1989 ("Determination of tensile strength and elongation"); however, for the purposes of the present invention the relative humidity was between 50% and 65%. Finally,
35 a bondability index, which is defined as the square root of the product of the machine direction strength and the cross direction strength, is calculated for each of the bonding temperatures.

The hydrophobic properties of nonwovens prepared from the fibres of the invention may be tested according to various methods, including a repellency test and a test for liquid
5 absorbency time. The liquid absorbency test may also be used for testing the hydrophobic properties of fibres, as described below.

The equipment used to measure the repellency (also referred
10 to as "water rising column", WRC) of the nonwoven is a 74 mm inner diameter by 62 cm high column equipped with a ruler. At the bottom of the column are two Plexiglas plates with circular holes in the centers. The holes are surrounded by
15 O-rings made of plastic. The upper plate is connected to the column. The bottom plate is connected to the upper plate by clamps. The sample of nonwoven is placed between the plates. A mirror is placed beneath the sample holder to detect the breakthrough of liquid. Distilled water is fed into the col-
20 umn 10 mm above the surface of the nonwoven sample through a 0.6 cm inner diameter hole in the side at a rate of 1085 cc/min. The WRC test is performed on a circular sample of nonwoven with a diameter of 102 mm, which has been condi-
25 tioned for at least 2 hours at a temperature of 23°C and a relative humidity of 50%. The measurement is repeated on three nonwoven samples. The WRC test involves measuring the pressure (expressed as cm water column) required to effect water penetration through a nonwoven subjected to an in-
creasing water pressure. Briefly, a circular section of a nonwoven sample of the desired base weight (typically about
30 22 g/m²) with a diameter of 74 mm is subjected to a water column whose height increases at a rate of 25 cm/min (10 inches/min), and the repellency of the nonwoven is defined as the height of the water column at the moment when the first drop of water penetrates the sample.

35

EXAMPLES

Fibres and nonwovens were prepared as follows:

Monocomponent fibers:

The polyolefin raw material (polypropylene of MFR 12 containing calcium stearate and stabilized with Irganox® 3114

5 and Irgafos® 168, both available from Ciba-Geigy Ltd.) was spun into fibres by conventional spinning (long spinning) technology, using spinning speeds of 1700-2300 m/min, resulting in a bundle of several hundred filaments. After quenching of the filaments by air cooling, the filaments
10 were treated by means of a lick roller with a first spin finish containing the components mentioned below.

The filaments were off-line stretched in a two-stage drawing operation using a combination of hot rollers and a hot air
15 oven, with temperatures in the range of 115-135°C. The stretch ratios were generally in the range of from 1.05:1 to 1.5:1. The stretched filaments were then treated (by means of a lick roller) with different second spin finishes.

20 The filaments were then crimped in a stuffer-box crimper and subsequently annealed in an oven at a temperature of about 125°C to reduce contraction of the fibres during the thermal bonding process and to allow the hydrophobic components of the second spin finish to become uniformly distributed on
25 the surface of the filaments. Staple fibres were then produced by cutting the filaments to the desired length.

Bicomponent PE (sheath) and PP (core) fibers:

30 The bicomponent fibers were produced from polypropylene of MFR 12 and high density polyethylene similarly to the monocomponent fibers, except that the spinning speed was 500-800 m/min, stretching was performed at 90-110 °C with a stretch ratio of from 2.5:1 to 5:1, and the temperature of the annealing oven was about 60°C.

35

In all the experiments an antistatic agent was sprayed onto the fiber bundle after the crimper.

All of the polypropylene fibres had a fineness of at the most 2.8 dtex, a fibre tenacity of 1.8-2.1 cN/dtex, an elongation at break of 350-420%, and a cut length of 41 or 45 mm, whereas the bicomponent fibres were about 2.2 dtex with a tenacity of 2.2-2.6 cN/dtex and an elongation at break of 120-150%. The fineness of the finished fibres was measured according to DIN 53812/2, and the elongation at break and tenacity of the fibres was measured according to DIN 53816.

10 Nonwovens were prepared from the various fibres by carding at various speeds and thermally bonding the webs at various temperatures (see Table 1). For each nonwoven, the tensile strength and elongation was measured in both the machine direction and the cross direction as described above (i.e. using the EDANA recommended test), and a bondability index was calculated as described above on the basis of the measured tensile strengths. In addition, the repellency was also determined by the method described above.

20 In the tables below, the fibre properties of a number of different fibres prepared as described above are given, along with the properties of nonwovens prepared from these fibres.

25 Table 1 shows the following: the melt flow rate of the spun fibres, the amount of first spin finish applied (active content, in percent by weight of the fibres), the web cohesion length in m, the total amount of spin finish on the fibres (active content, in percent by weight of the fibres), and
30 the water rising column value of the fibres in cm. In addition the following characteristics of nonwovens prepared from the fibres of the experiments are shown in Table 1: the water rising column value measured, the basis weight of the nonwoven sample used for measuring WRC and the maximum bonding index. (Note: the WRC values for the nonwovens in Table
35 1 are not corrected for the actual nonwoven basis weight. Thus, when comparing WRC values for different nonwovens, the WRC values should be viewed in relation to the basis weight in order to obtain a meaningful comparison).

All of the monocomponent fibres in the examples were produced on a polypropylene raw material with an MFR of 12. When measured according to the EDANA test procedure (10.1-72) on a 10 g sample of carded web, they all showed a sinking time of more than 24 h, indicating that the fibres were highly hydrophobic.

The spin finish system types referred to in Table 1 are described below: (a "theoretical" amount of 0.1% antistatic agent was sprayed onto the fibres as a "standard" treatment, the term "theoretical" referring to the fact that a small amount of the applied antistatic agent is not maintained on the fibre surface).

<u>SYSTEM</u>	<u>SPIN</u>	<u>STRETCH</u>	<u>SPRAY</u>
I	A	A	B
II	A	A	C

A: 47% neopentyl glycol ester
47% mineral oil
2.5% decaglycerol ester
3.5% ethoxylated alcohols

B: 66.7% alkyl phosphoric acid ester salt (potassium butyl phosphate)
27.6% PEG (polyethylene glycol) phosphate, potassium salt
5.7% glycerol

C: fatty acid condensation product (Beistat 1107, commercial product from CHT R. Beitlich GmbH, Germany)

TABLE 1.

PP fibres - spin finish system type I

Example	Spun fibres		Cut fibres		Nonwoven	
	MFR	FOY %	Carding length (m)	FOY %	WRC (23g) cm	BI (max) N / 5 cm
1	51.5	0.1	2.0 - 2.25	0.15	7.5	25.73
2	44	0.1	2	0.15	9.1	23.77
3	58	0.1	2	0.45	8.3	25.35
4	54.5	0.1	1.5	0.2	9.2	29.96
5	58	0.15	1.5	0.3	5.7	23.18
6	30	0.1	1.5	0.2	9.6	25.72
7	35	0.2	1.25	0.3	7.1	34.51
8	34	0.1	1.5	0.25	8.3	29.73
9	34	0.1	1.5	0.15	10	24.11
10	37	0.2	1.5	0.3	8.2	22.98
11	28	0.1	1.75	0.25	9.3	15.83
12	26	0.1	1.75	0.25	8.8	18.4
13	52	0.1	1.5	0.05	9.9	28.94
14	46	0.15	1.75	0.2	9.1	25.99
15	40	0.15	1.5	0.2	9.3	29.27
16	28	0.2	1.5	0.3	10.5	22.23

Table 1 (continued)

PP/PE bicomponent fibres - spin finish system type I.

Example	Spun fibres MFI (wet)	FOY %	Carding length (m)	Cut fibres FOY %	WRC cm	WRC (23g) cm	Nonwoven g/ m2 "actual"	BI (max) N / 5 cm
17	N/A		2	0.3	15.46	6.2	22	13.4

Spin finish system type II (cationic antistatic agent).

Example	Spun fibres MFI (wet)	FOY %	Carding length (m)	Cut fibres FOY %	WRC cm	WRC (23g) cm	Nonwoven g/ m2 "actual"	BI (max) N / 5 cm
18	24	0.15	1.5	0.2	8.48	6.5	23.4	19.81

Comments on the fibres in Table 1

- Examples 1-2: different melt temperatures resulted in different MFR values for these two fibres.
- Examples 3-4: correspond to Examples 1-2 but with different % FOY on the cut fibres.
- Example 5: similar to Example 2, but with a different polymer lot.
- Example 6: similar to Example 5, but with a lower melt temperature and higher cooling air velocity, resulting in a lower MFR and a higher WRC.
- Examples 7-8: similar to Example 6, but with a different % FOY.
- Example 9: similar to Example 6, but with half the amount of antistatic agent and half the amount of lubricant applied after spinning.
- Examples 10-12: low fibre MFR obtained by varying the cooling air velocity and spinning temperature.
- Examples 13-16: variable MFR values.
- Example 18: PP fibres similar to Example 6, but with a cationic antistatic agent.

Comments on the test results with reference to the examples in Table 1.

Fiber MFR

- The hydrophobicity (WRC data), at least for polypropylene fibres, is related to the MFR, a lower MFR tending to give a higher WRC value. While not wishing to be bound by any theory, this is believed to be due to the fact that a highly degraded fibre (i.e. a fibre with a high MFR) carries oxidized, i.e. polar, groups on its surface, which render the fiber somewhat hydrophilic, whereas a less degraded fiber (with a lower MFR) inherently has a more hydrophobic surface due to the lack of oxidized groups. Fig. 1 shows a plot of nonwoven WRC data versus fibre MFR for Examples 1, 2, 5, 6

and 10-16 in Table 1. The linear trend curve clearly demonstrates that the tendency mentioned above is valid over a broad range of MFR values.

- 5 The fibre MFR has an effect on the bonding properties of the fibres as well. For example, a graph of the bonding index in relation to MFR for the polypropylene fibres tested for purposes of the present invention shows a characteristic pattern with increasing bondability index (BI) up to an MFR of
10 about 40-45 g/10 min and then decreasing BI with further increasing MFR (Fig. 2).

Nonwoven basis weight

- 15 The experiments have shown that at a basis weight of 23 g/cm², WRC values of at least 9 cm are able to be achieved with spin finish system type I at MFR values giving high BI values. Higher basis weights will of course give higher WRC values, while lower basis weights will give somewhat lower values, with more uniform nonwovens giving higher WRC values
20 for the same weight. Table 2 and Fig. 3 show examples of the influence of the nonwoven basis weight on the water rising column (WRC) values.

Table 2. WRC values vs. nonwoven basis weight

Example	MFR	g/ m2 "actual"	WRC cm
13	52	22.4	7.7
		26.3	9.9
		28.2	9
		32.2	11
14	46	20.4	6.6
		22.2	9.1
		24	8.9
		28.1	9.5
15	40	19.6	8.2
		22.2	9.3
		23.2	9.6
		25.3	10.9
16	28	20.1	9.1
		24.2	10.5
		26.9	12.1

Percent finish

5 The percent finish applied to the fibres is not believed to be critical, although there appears to be a tendency for lower finish percentages to give higher WRC values. This is shown by comparing e.g. Examples 3+4 and 7+8. The antistatic agent, being the most hydrophilic ingredient in the spin
10 finish system, is believed to be most critical in this regard, and the amount of antistatic agent should therefore preferably be kept to a minimum. Example 9 shows a large increase in the WRC value when, in addition to a small decrease in lubricant applied after spinning, the amount of
15 antistatic agent sprayed onto the fibres is reduced to 50% of the "standard" amount used in these examples.

Example 18, in which a cationic antistatic agent was used, shows that the use of a cationic antistatic agent has a
20 negative impact on the WRC value. The WRC value in this example is still fairly good, however.

Conclusions


25 On the basis of these experiments, it may be concluded that the best hydrophobic properties are obtained by operating with a relatively low fibre MFR. Bondability, however, is generally good within a broad MFR range, e.g. a range of about 30-55 for the fibres tested in these examples. It
30 should be noted in this regard that the optimum MFR range for good bondability may be expected to vary depending on the nature of the polymer raw material. For a given polymer and given spinning conditions, etc. it will lie within the ability of a person of ordinary skill in the art to determine the optimum MFR, taking into consideration the fibre
35 characteristics desired in each individual case. The amount of spin finish, while not being believed to be critical, should preferably be kept to a minimum. This applies in particular to the antistatic agent.

CLAIMS for USA

1. A method for producing hydrophobic polyolefin-containing fibres or filaments, the method comprising the following steps:
- 5 a. melt spinning a polyolefin-containing material to produce spun filaments,
 - b. applying to the spun filaments a first spin finish with an active ingredient content comprising 20-100% by weight of at least one water-insoluble ester of a mono-, di-, tri- or tetrahydric alcohol with a molecular weight not exceeding 500 and a branched or straight chain fatty acid with between 12 and 30 carbon atoms,
 - 10 c. stretching the filaments,
 - d. applying to the stretched filaments a second spin finish with an active ingredient content comprising 20-100% by weight of at least one water-insoluble ester of a mono-, di-, tri- or tetrahydric alcohol with a molecular weight not exceeding 500 and a branched or straight chain fatty acid with between 12 and 30 carbon atoms,
 - 15 e. optionally, crimping the filaments,
 - f. applying, during the spinning stage, the stretching stage or after crimping, an antistatic agent,
 - g. drying the filaments, and
 - h. for the production of fibres, cutting the filaments to obtain staple fibres.
 - 20
2. A method according to claim 1 wherein the fibres or filaments are cardable staple fibres.
3. A method according to claim 1, wherein the polyolefin-containing material is polypropylene, polyethylene or a copolymer thereof.
- 25
4. A method according to claim 1, wherein the melt spinning is performed so that the melt flow rate of the spun filaments is between 1.5 and 7 times the initial MFR of the polyolefin-containing material before spinning as measured according to ISO 1133.
- 30
5. A method according to claim 1, wherein the active ingredient content of the first and/or second spin finish comprises up to 80% by weight of a mineral oil and up to 10% by weight of an ethoxylated alcohol.
6. A method according to claim 1, wherein the water-insoluble ester is the reaction product
- 35
- of a polyol having the formula:



or

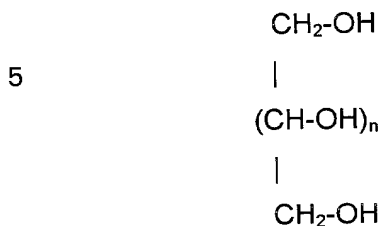

10 in which R is an alkyl group having 1 to 4 carbon atoms; m is 0 to 3 and n is 0 to 4; and a branched or straight chain fatty acid having between 12 and 30 carbon atoms.

7. A method according to claim 6 wherein the alcohol is selected from the group consisting of ethylene glycol, propylene glycol, glycerol, neopentyl glycol, trimethylolethane and
15 trimethylolpropane.

8. A method according to claim 6 wherein the ester is a monoester, a diester or a polyester.

9. A method according to claim 1, wherein the first and/or second spin finish comprises at
20 least one water-insoluble ester of glycerol and at least one saturated or unsaturated fatty acid residue having 12-24 carbon atoms.

10. A method according to claim 1, wherein the first and/or second spin finish comprises at least one water-insoluble ester in the form of a monoester of a fatty acid having 14-18
25 carbon atoms and a branched chain alcohol.

11. A method according to claim 1, wherein the first and/or second spin finish comprises at least one water-insoluble ester of glycerol and at least one saturated or unsaturated fatty acid residue having 12-24 carbon atoms and at least one water-insoluble ester of
30 neopentyl glycol and at least fatty acid residue having 12-24 carbon atoms.

12. A method according to claim 1, wherein the antistatic agent is applied after crimping.

13. A method according to claim 1, wherein the antistatic agent is anionic or nonionic.
35

14. A method according to claim 1, wherein the antistatic agent has the formula $R^1R^2O_3PO^-M^+$, where R^1 and R^2 are independently selected from the group consisting of C_2 - C_{30} alkyl and polyether, and M^+ is an alkali metal ion, an ammonium ion or a proton.
- 5 15. A method according to claim 1, wherein the antistatic agent has the formula $R^1R^2R^3O_3PO$, where R^1 , R^2 and R^3 are independently selected from the group consisting of methyl, C_2 - C_{30} alkyl and polyether.
16. A method according to claim 1 wherein the first and/or second spin finish comprises
- 10 0.1-2% by weight (active ingredient content, based on the total active ingredient content) of a wetting agent.
17. A method according to claim 1 wherein the first and/or second spin finish comprises 0.5-15% by weight (active ingredient content, based on the total active ingredient content)
- 15 of a friction reducing additive comprising a wax or wax mixture and/or a polydiorganosiloxane.
18. A polyolefin-containing fibre produced according to the method of claim 1.
- 20 19. A polyolefin-containing fibre carrying at its surface 0.01-1.0% by weight of the fibre of at least one water-insoluble ester of a mono-, di-, tri- or tetrahydric alcohol with a molecular weight not exceeding 500 and a branched or straight chain fatty acid with between 12 and 30 carbon atoms.
- 25 20. A method for producing a nonwoven material, the method comprising providing a web of fibres according to claim 18 and bonding the web to produce the nonwoven material.
21. A method for producing a nonwoven material, the method comprising providing a web of fibres according to claim 19 and bonding the web to produce the nonwoven material.
- 30 22. A nonwoven material comprising fibres according to claim 18.
23. A nonwoven material comprising fibres according to claim 19.

24. A composite material comprising a nonwoven material according to claim 22, wherein said nonwoven material is:

- a. laminated to a film layer or otherwise provided with a film coating; or
- b. bonded to or otherwise provided with a spunbonded layer or a layer of meltblown fibres.

25. A composite material comprising a nonwoven material according to claim 23, wherein said nonwoven material is:

- a. laminated to a film layer or otherwise provided with a film coating; or
- b. bonded to or otherwise provided with a spunbonded layer or a layer of meltblown fibres.

1/3

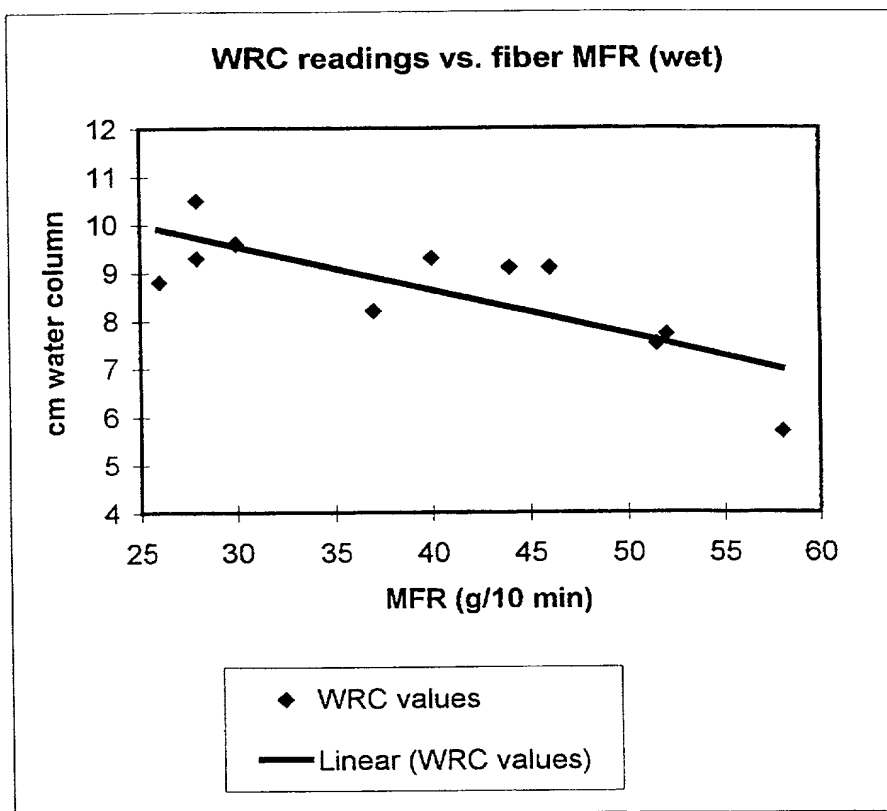


Fig. 1

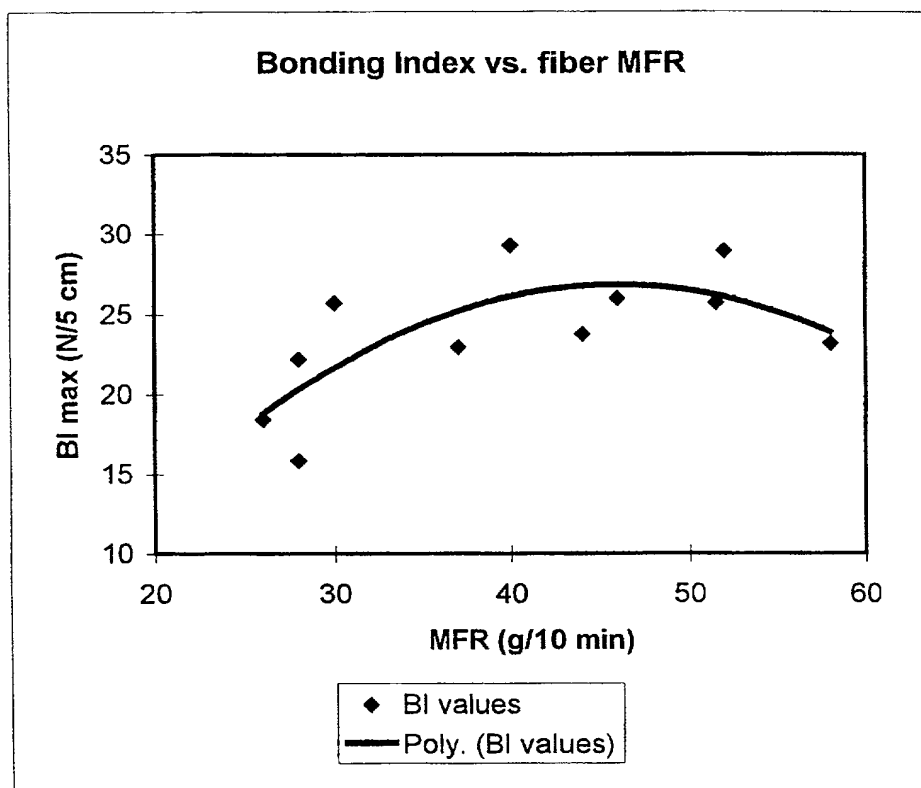


Fig. 2

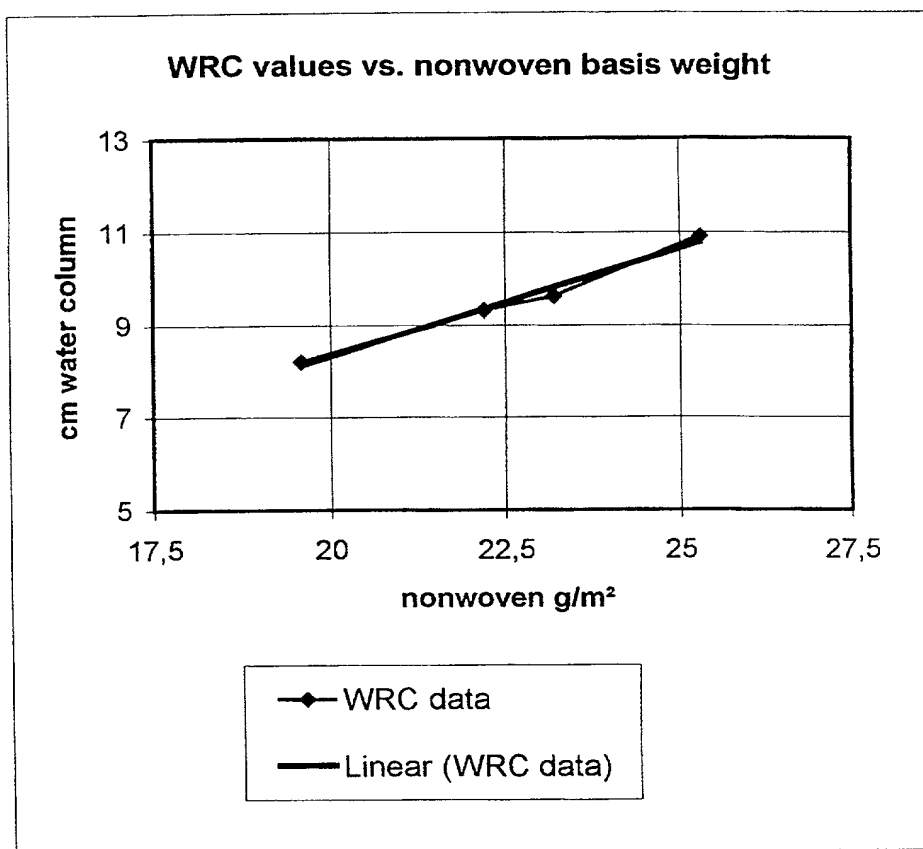


Fig. 3

BIRCH, STEWART, KOLASCH & BIRCH, LLP

P.O. Box 747 • Falls Church, Virginia 22040-0747

Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

ATTORNEY DOCKET NO.
459-303P

PLEASE NOTE:
YOU MUST
COMPLETE THE
FOLLOWING: ↓

COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT AND DESIGN APPLICATIONS

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Insert Title: → POLYOLEFIN FIBRES AND METHOD FOR THE PRODUCTION THEREOF

Fill in Appropriate
Information —
For Use →
Without
Specification
Attached:

the specification of which is attached hereto. If not attached hereto,

the specification was filed on _____ as
United States Application Number _____;
and amended on _____ (if applicable); and/or
the specification was filed on _____ as PCT
International Application Number _____; and was
amended under PCT Article 19 on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 (a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

<u>1178/96</u> (Number)	<u>Denmark</u> (Country)	<u>10/24/1996</u> (Month / Day / Year Filed)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
<u>60/029,913</u> (Number)	<u>United States</u> (Country)	<u>11/4/1996</u> (Month / Day / Year Filed)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
<u>0071/97</u> (Number)	<u>Denmark</u> (Country)	<u>1/20/1997</u> (Month / Day / Year Filed)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Month / Day / Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below.

_____ (Application Number)	_____ (Filing Date)
_____ (Application Number)	_____ (Filing Date)

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More than 12 Months (6 Months for Designs) Prior to the Filing Date of This Application:

Country	Application Number	Date of Filing (Month / Day / Year)
_____	_____	_____
_____	_____	_____

I hereby claim the benefit under Title 35, United States Code, §120 of any United States and/or PCT application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States and/or PCT application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

_____ (Application Number)	_____ (Filing Date)	_____ (Status — patented, pending, abandoned)
_____ (Application Number)	_____ (Filing Date)	_____ (Status — patented, pending, abandoned)

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, unless the inventor(s) or assignee provides said attorneys with a written notice to the contrary:

Raymond C. Stewart	(Reg. No. <u>21,066</u>)	Terrell C. Birch	(Reg. No. <u>19,382</u>)
Joseph A. Kolasch	(Reg. No. <u>22,463</u>)	James M. Slattery	(Reg. No. <u>28,380</u>)
Bernard L. Sweeney	(Reg. No. <u>24,448</u>)	Michael K. Mutter	(Reg. No. <u>29,680</u>)
Charles Gorenstein	(Reg. No. <u>29,271</u>)	Gerald M. Murphy, Jr.	(Reg. No. <u>28,977</u>)
Leonard R. Svensson	(Reg. No. <u>30,330</u>)	Terry L. Clark	(Reg. No. <u>32,644</u>)
Andrew D. Meikle	(Reg. No. <u>32,868</u>)	Marc S. Weiner	(Reg. No. <u>32,181</u>)
Joe McKinney Muncy	(Reg. No. <u>32,334</u>)	C. Joseph Faraci	(Reg. No. <u>32,350</u>)
Donald J. Daley	(Reg. No. <u>34,313</u>)	John W. Bailey	(Reg. No. <u>32,881</u>)
John A. Castellano	(Reg. No. <u>35,094</u>)		

Send Correspondence to: **BIRCH, STEWART, KOLASCH & BIRCH, LLP**
P.O. Box 747 • Falls Church, Virginia 22040-0747
 Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

PLEASE NOTE:
 YOU MUST
 COMPLETE
 THE
 FOLLOWING:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or
 Sole Inventor
 Insert Name of
 Inventor
 Insert Date This
 Document is Signed
 Insert Residence
 Insert Citizenship
 Insert Post Office
 Address

GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Flemming	STENGAARD	<i>Flemming Stengaard</i>	2/4-99
Residence (City, State & Country)		CITIZENSHIP	
Varde Denmark DKX		Danish	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
Torvegade 75 DK-6800 Varde Denmark			

Full Name of Second
 Inventor, if any
 see above

GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Henrik	BALSLEV	<i>Henrik Balslev</i>	3/5-99
Residence (City, State & Country)		CITIZENSHIP	
Bramminge Denmark DKX		Danish	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
Norregade 52B DK-6740 Bramminge Denmark			

Full Name of Third
 Inventor, if any
 see above

GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Peter	CARSTENSEN	<i>Peter Carstensen</i>	2/4-99
Residence (City, State & Country)		CITIZENSHIP	
Fredericia Denmark DKX		Danish	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
Jens Thuesensvej 48 DK-7000 Fredericia Denmark			

Full Name of Fourth
 Inventor, if any
 see above

GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			

Full Name of Fifth
 Inventor, if any
 see above

GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			